Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

FO-50360-L

CW-B4025

REV	DOCUMENT	CHANGED BY	CHECK
7	202141	TSM 12JAN01	SAV

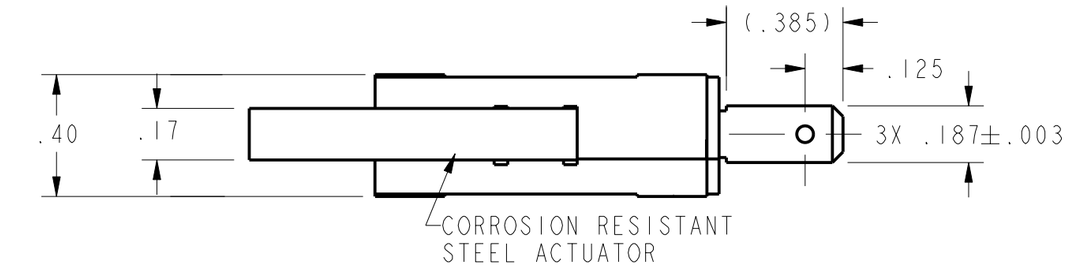

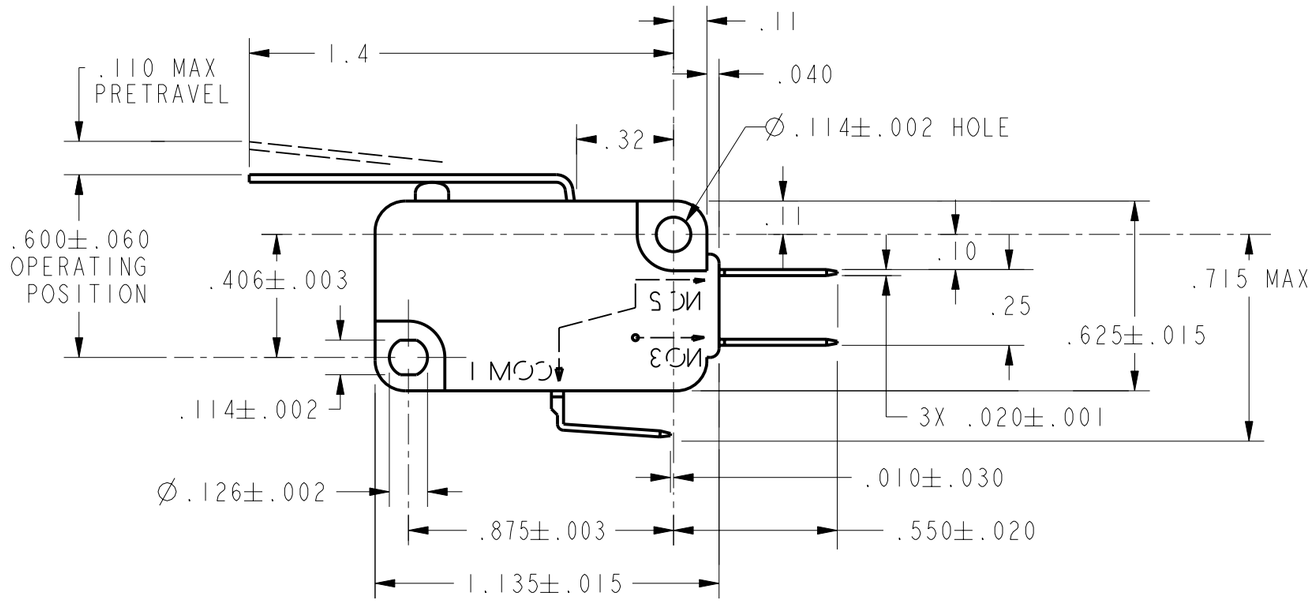

Jameco Part Number 203545

CHARACTERISTICS	
OPERATING FORCE	30 GRAMS MAX
RELEASE TRAVEL	.017 MIN
RELEASE FORCE	2 GRAM MIN
DIFFERENTIAL TRAVEL	.030 MAX
OVERTRAVEL	.090 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L216
10A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC
1/4A 250 VDC; 4A 125 VAC "L"

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		± 3°	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	TSM	12JAN01
CHECK	SAV	12JAN01

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL SENSING AND CONTROL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell
Sensing and Control

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	M	V7-3E11D8-022	7

SCALE 2:1 | WEIGHT | SHEET 1 OF 1